



GRANDFLASH GF 300
CA (Cyanoacrylate) Adhesive, universal,
low viscous



The New Generation Cyanoacrylate:

- odorless
- no blooming
- high adhesion
- simple application
- transparent application for PMMA
- remains flexible
- quick hand strength
- no impairment of electronic components

The values are average values. They serve merely for your information, but assume no warranty.

Basis:	Methoxyethyl Cyanoacrylate
Color:	transparent, colorless
Viscosity 25°C (Brookfield):	about 40 - 60 mPa.s
Density:	1,14 g/cm ³
Storage time at 5°C to 8°C:	12 months
Gap filling:	< 0,1 mm
Temperature resistance:	-50 to +80°C
Fixture time:	about. 5 - 90 seconds
Full Strength:	24 hours

Fields of application:

Newly developed production method for bonding a wide variety of material compounds (metal, rubber, wood, cardboard, ceramics and most plastics) and among each other.

Grand Flash GmbH ■ Mainblick 47 G, D-65779 Kelkheim/Taunus ■ Tel. 0174 948 90 69 ■ info@grandflash.de
 ■ www.grandflash.de



GRANDFLASH GF 300
CA (Cyanoacrylate) Adhesive, universal,
low viscous



Despite residual flexibility **GRANDFLASH GF 300** achieves very high strengths in most materials.

Instructions for use:

The parts to be bonded must be clean, oil and grease. **GRANDFLASH GF 300** thinly on one side and add and press together the parts to be joined together. The parts should be positioned as closely as possible because of the low partial fixing time. The hand strength is around 5 - reaches 90 seconds, and the ultimate strength after about 24 hours. **GRANDFLASH GF 300** cures at room temperature in combination with humidity. The optimum relative humidity should be around 65%. In order to accelerate the curing, our GRANDFLASH activator can be used. For materials such as PP, PE, PTFE or silicone parts such as have our GRANDFLASH primers are pretreated.


Fixture / shear strength: Fixture / shear strength:

	Fixation time (sec.)	Shear strength (N / mm ²)
ABS	20	12 - 13
Structural steel	10	9,2 - 13,9
polymethylmethacrylate	150	6 - 8
polycarbonatet	35	8,2 - 9,8
Aluminium	30	2,8-4,8
Pinewood	35	10,0 - 13,7
Beech wood	25	9,0 - 12,3
Oak	105	9,6 - 11,7
PVC	30	5,3-7,8

Material breach



GRANDFLASH GF 300
 CA (Cyanoacrylate) Adhesive, universal,
 low viscous

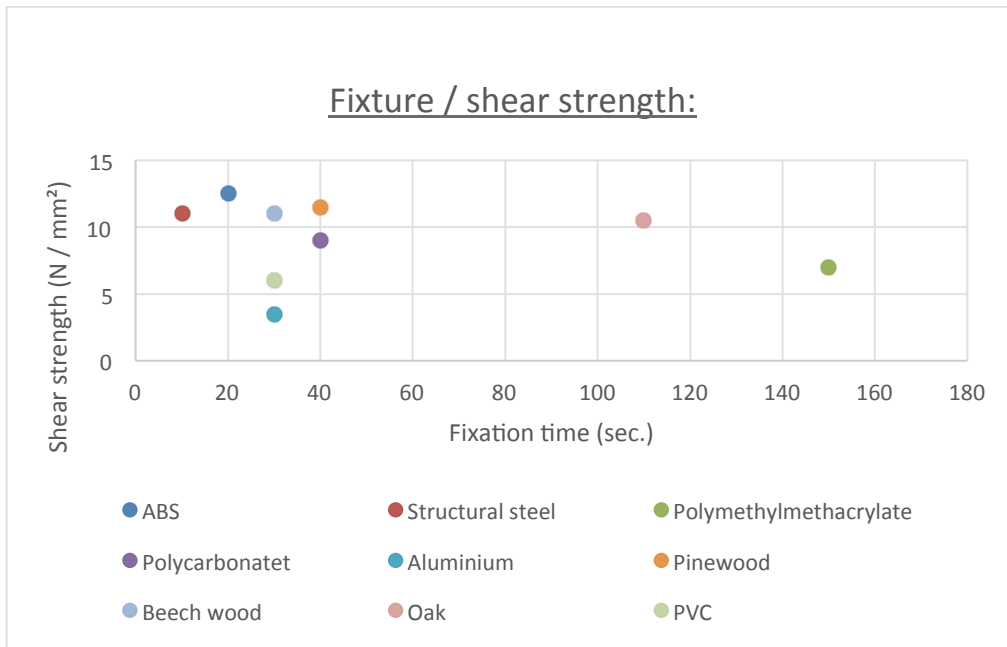

Storage:

cool, dry, dark, optimum temperature: 4°C – 8°C.

RoHS compliant

Packaging: 20 g, 50g, 500g Flaschen.